


PIPE TO STRUCTURE COLLAR

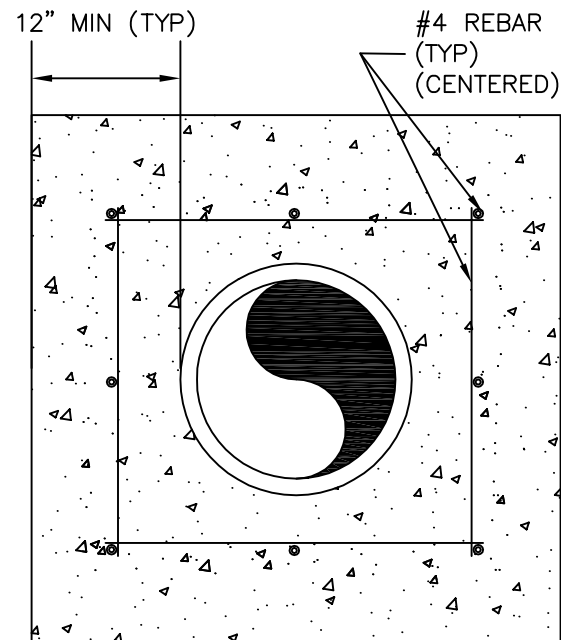

COLLAR SECTION A

NOTES

1. SEE SHEET SW-01 FOR SPECIFICATIONS AND ADDITIONAL NOTES/DETAILS.
2. IF A KNOCK-OUT IS USED, THE COLLAR SHALL COVER THE ENTIRE SIDE OF THE STRUCTURE.
3. CONCRETE FOR COLLARS SHALL BE VIBRATED.
4. COLLARS SHALL BE FORMED. AFTER COMPLETION OF COLLARS, FORMS SHALL BE REMOVED.
5. EPOXY SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.
6. 2" MIN COVER FOR DOWELS IN ALL DIRECTIONS.

1

TS

CREATED

2/2015



STANDARD DETAIL

SW-06

PIPE TO STRUCTURE COLLAR

SCALE: NONE

NO.

AUTHORIZED BY

REVISIONS

DATE